

# AVLELEC

www.SoundmaskingInstallation.com

## FLAT-PAK™ SERIES

Model FP-PA20A

Audio Power Amplifier

### ANYWHERE YOU NEED...

- 20 Watts RMS Constant Voltage Amplifier
- 70 V and 100 V Outputs
- Maximized Audio Level for Output Power
- Audio Quality Superior to Standard Amplifiers
- Input / Output Terminal Block Connections
- Line Level Balanced or Unbalanced Input
- Integral Audio Compressor to Control Clipping
- High Overall Operating Audio Level
- Peak LED to Indicate Audio Compression
- Ultra-compact All Metal Construction
- Convenience of AVLELEC FLAT-PAKs



### *You Need The FP-PA20A!*

The FP-PA20A is part of the group of versatile AVLELEC FLAT-PAK products. The unique AVLELEC FLAT-PAK case can be directly screwed or bolted to cabinets or shelves. Optionally available rack-mounting accessories permit single or multiple FLAT-PAK module mounting.

**APPLICATION:** The FP-PA20A is the ideal choice in many applications where multiple 70 V or 100 V speakers in a zone need to be powered from a single audio power amplifier.

The FP-PA20A features a balanced line level input that may be connected unbalanced. A front panel gain control is designed to be adjusted either manually or with a trimming screwdriver. The gain range will accommodate standard unbalanced levels as well as professional balanced levels. Both a 70 V and 100 V amplified output are provided to drive corresponding speakers in a distributed sound system.

A red PEAK LED is provided to indicate the threshold of the integral compressor. Audio levels that could cause the amplified output to clip are compressed according to two dynamic time constants. Normal audio level signals remain unaffected by the compressor thereby preserving audio dynamics and preventing the compressor from increasing feedback potential when the amplifier is used for paging. The compressor is designed to remain aurally transparent while maintaining clean, unclipped amplified audio for input overloads of up to 20 dB. In addition to the compressor, an active filter circuit prevents saturation of the output transformer at low frequencies. The FP-PA20A produces average audio levels and audio clarity normally expected of amplifiers delivering much higher output power.


The durable construction and low profile of the FP-PA20A allow mounting in a wide range of locations not suited to a conventional style power amplifier. Power is provided to the module either through the barrier block or through the DC power jack. For full RMS output power, a 24 VDC 2A power supply is required. A 1A supply is sufficient for normal program audio levels and content. Power supplies are sold separately.

Wherever a high quality constant voltage audio power amplifier is needed to provide reliability, compactness and unsurpassed versatility, the FP-PA20A is the ideal choice. Use the FP-PA20A individually, or combine it with other AVLELEC products as part of a complete audio/video system.

**AVLELEC**  
www.SoundmaskingInstallation.com

8641 S. Warhawk Rd. Conifer, CO 80433  
Patrick.McAllister@AVLELEC.com  
(303) 670-1099 (303) 679-8949 fax





# AVLELEC

www.SoundmaskingInstallation.com

## FLAT-PAK™ SERIES



### Model FP-PA20A

### Audio Power Amplifier

## Installation/Operation



EN55103-1 E1-E5; EN55103-2 E1-E4  
 Typical Performance reflects product at publication time  
 exclusive of EMC data, if any, supplied with product.  
 Specifications are subject to change without notice.

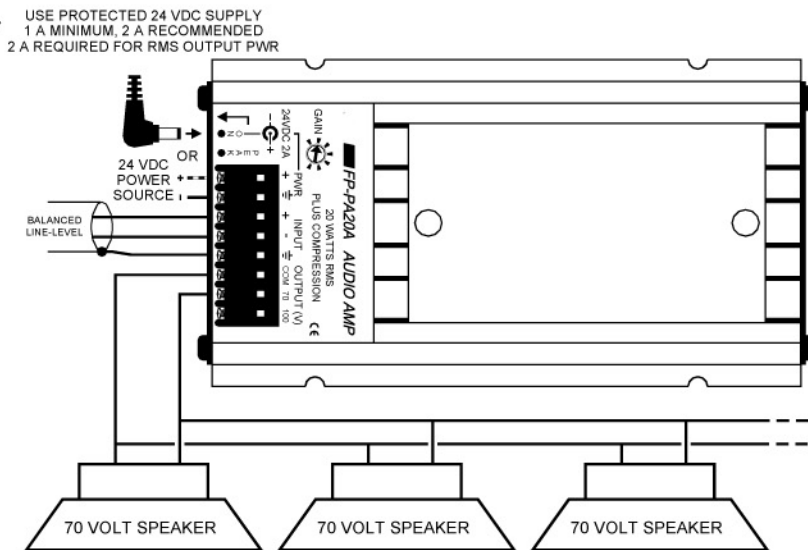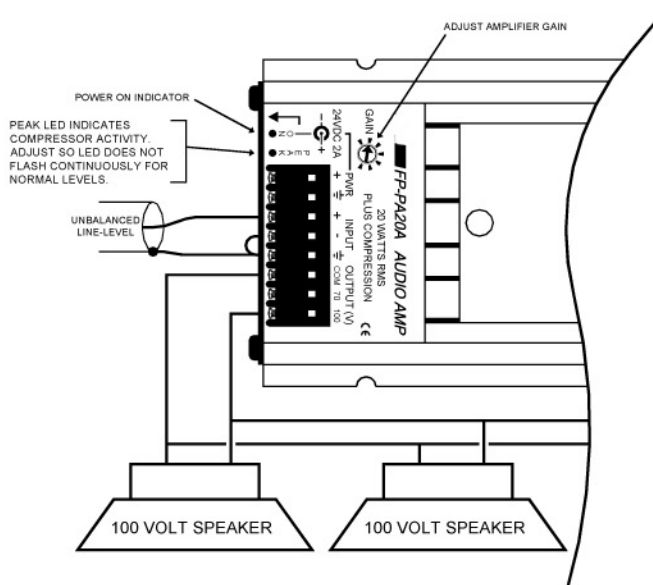

### TYPICAL PERFORMANCE

**Input:** Line level  
 (+4 dBu nominal balanced)  
 (-10 dBV nominal unbalanced)

**Input Impedance:** 20 k $\Omega$  balanced bridging  
 10 k $\Omega$  unbalanced  
 Plug-in terminal block  
 Single turn audio taper

**Input / Output Connectors:** Plug-in terminal block

**Gain Adjustment:** Single turn audio taper

**Minimum Input Levels:**  
 Balanced: -26 dBu (to cross compressor threshold)  
 Unbalanced: -28 dBV (to cross compressor threshold)

**Maximum Input Levels:**  
 Balanced: +23 dBu  
 Unbalanced: +15 dBV

**Frequency Response:** 50 Hz to 20 kHz (+/- 3 dB)\*

**THD+N:** < 0.1% (@ 1 kHz)\*  
 < 0.5% (50 Hz to 20 kHz)\*

**Compressor:** Threshold 6 dB below rated output,  
 automatic adjusting attack and release

**Noise:** < -80 dB (below 20 W RMS)


**CMRR:** > 55 dB (50 Hz to 120 Hz)

**Output Power:** 20 W RMS @ 70 V or 100 V

**Ambient Operating Environment:** 0° C to 30° C Maximum; 20° C Recommended

**Power Requirement:** 24 Vdc @ 1650 mA (for continuous RMS power output, Ground referenced)  
 24 to 33 Vdc @ 1000 mA (for normal program material with minimal compression, Ground referenced)

**Indicators (2):** Red LED: PEAK LED indicates compressor activity  
 Green LED: Power ON

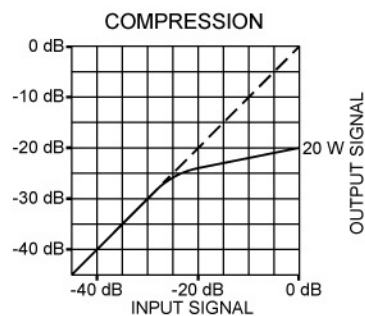

\*measured at compressor threshold level equaling 4 W RMS output power

**Overall Dimensions:**

Height:	2.30 in.	5.85 cm
Width:	3.25 in.	8.26 cm
Length:	6.04 in.	15.3 cm